
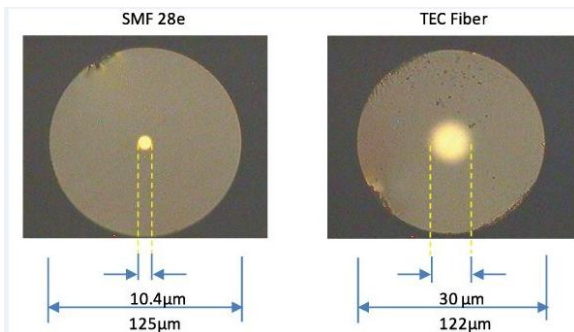


TEC Fiber

Features:
Low Excess Loss Large Expanded Field More Tolerance For Alignment
Application:
Low Loss Splicing Point For Different Fiber Fiber Alignment High Power Connector Pigtails High Coupling Efficient To Laser

Specification

	unit	Value
After TEC Treatment	MFD (um)	$10^{25} (\pm 2)$
TEC Region Length	Le (mm)	>0.5
Bare fiber Length	Lg (mm)	5 ± 0.5
Fiber Length	m	1 ± 0.2
Fiber	SMF-28e, RC80 SMF-28e HI1060FLEX or OFS980	

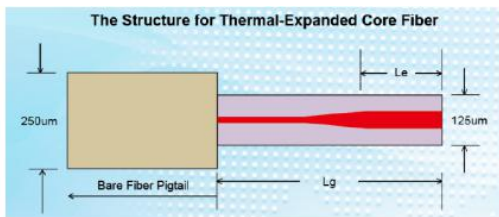

Ordering Information

TEC	MFD	Expend Length	Strip Length	Fiber	Length	000000
	10=10 15=15 20=20 25=25 30=30	1=1mm S=specify	5=5mm 6=6mm 7=7mm	1=SMF-28e 2=HI1060FLEX 2=OFS98-20 3=RC SM1550 4=Other	1=1m X=Other	