

Mini Size Polarization Insensitive Isolator

Features:
Wide Operating Wavelength High isolation & Low insertion loss & Low PDL Mini Size
Application:
EDFA Transmitters WDM & DWDM System Testing instruments


Specifications:

Parameter	Single stage		Dual Stage	
	P	A	P	A
Operating wavelength (nm)	1310, 1550			
Bandwidth(nm)	±15			
Peak Isolation (dB)	40	38	50	48
Isolation @23°C(dB)	≥28	≥26	≥42	≥40
Typ. Insertion Loss	0.4	0.5	0.5	0.6
Insertion Loss @-5 ~ +70 °C(dB)	≤0.6	≤0.7	≤0.70	≤0.80
PDL @ 23°C (dB)	≤0.1	≤0.15	≤0.1	≤0.15
PMD (ps)	≤0.25	≤0.25	≤0.25	≤0.25
Return loss (dB)	≥55/50			
Power handling (mW)	≤300			
Fiber Type	SMF-28e			
Operating temperature (°C)	-5~ +70			
Storage temperature (°C)	-40 ~ +80			
Dimensions (mm)	φ3.0×L22 (P5) or φ3.0×L25(P6)			

*Above specifications are for devices without the connectors.

*For devices with connectors, IL will be 0.3dB higher, RL will be 5dB lower

Packing Dimensions:

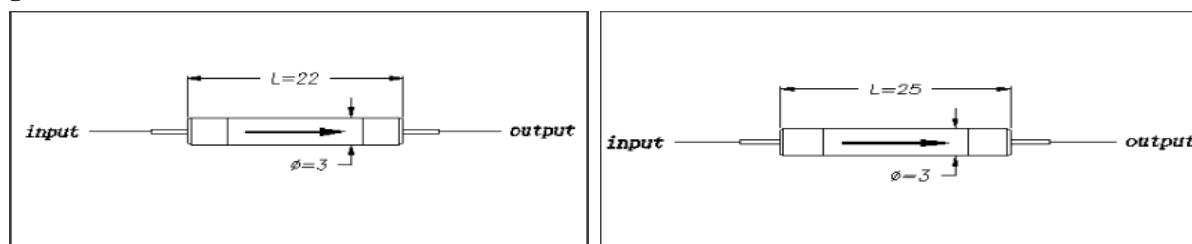

Mini Size Polarization Insensitive Isolator

Ordering Information:

PIIS	Wavelength	Type	Grade	0	Package	Pigtail Type	Length	Connector
	1310=1310nm 1450=1450nm 1480=1480nm 1550=1550nm	S= Single Stage D = Dual Stage	P=P Grade A=A Grade		5=P5(3.0*22mm) 6=P6(3.0*25mm)	1=250um bare fiber 2=900um loose tube 3=3mm loose tube 4=2mm loose tube S=Specify	H=0.5m 8=0.8m 1=1.0m 5=1.5m 2=2.0m 3=3.0m 4=4.0m A=2.5m B=5.0m S=Specify	0=None 1=FC/UPC 2=FC/APC 3=SC/APC 4=SC/UPC 5=MU 6=LC/UPC 7=LC/APC S=Specify