


## 1x3 Filter WDM

### Specifications

Parameter	1x3	
Central wavelength (nm)	1510, 1528-1565, 1625nm	1310,1490,1550
Pass band wavelength(nm)	1510+/-6.5	1490
Reflection wavelength(nm)	1610-1630, 1528-1565	1310+/-50. 1550+/-10
Insertion Loss (dB)	≤1.2	≤1.2
Pass Isolation (dB)	≥30	
Reflection Isolation (dB)	≥15	
Directivity (dB)	≥55	
Return loss (dB)	≥50	
PDL(dB)	≤0.10	
Wavelength thermal stability (dB)	≤0.003	
Insertion loss thermal stability(dB)	≤0.005	
Fiber	G657A1	
Power handling (mW)	≤500	
Operating temperature(°C)	-40 ~ +85	
Storage temperature(°C)	-40 ~ +85	
Dimensions(mm)	Φ5.5×L50	

### Package Dimensions

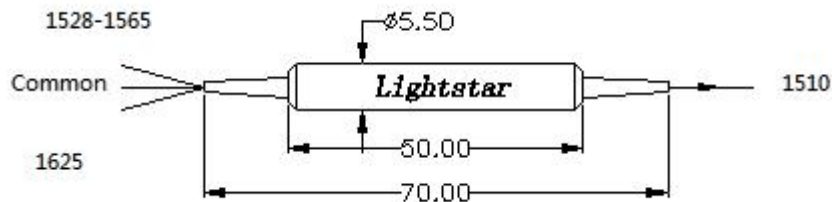

### Ordering Information

FWDM	Port	Wavelength	00	Package Type	Pigtail Type	Length	Connector
	3=1x3	1490=1310/1490/ 1550 1510=1510/1550/ 1625		1=OD 5.5x50	2=900um loose tube	H=0.5m 8=0.8m 1=1.0m S=Specif y	0=None 6=LC/UP C 7=LC/APC S=Specify