

MPO/MTP Patchcord

Features:
Low Insertion Loss High Repeatability Comply with RoHS/Reach,UL94-V0
Application:
Telecom Network CATV Network SDH Network


Specifications:

Parameter	Value
Connector Type	MPO
Fiber Type	SM 9/125 G652D 50/125 (OM3, OM4)
Insertion loss (dB)	MPO/MTP ≤0.7 (Standard) ;≤0.5 (Low Loss) LC,FC IL<0.3dB
Return loss (dB)	≥40 (UPC) , ≥60 (APC) ≥20 (MM)
Durability	≤0.2 (dB)
Operating temperature (°C)	-40 ~ + 85
Cable type	Round or Ribbon Fiber
Length	1m, 2m, 3m, 10m, customize

Housing color—Blue(SM/UPC),Green(SM/APC),Beige(MM),Aqua

Polarity

:

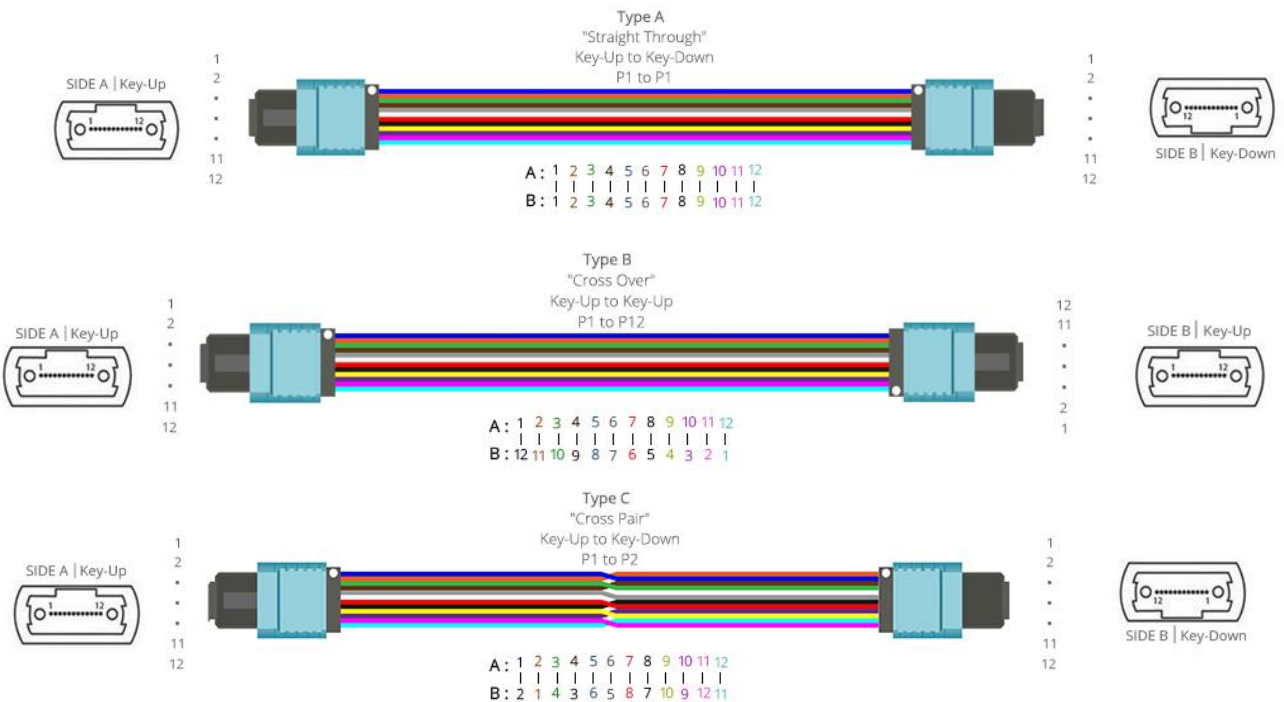

MPO/MTP Patchcord



Ordering Information

MPO	Connector (End1)	Connector (End2)	Tested Wavelength	00	Method	Cable Pigtail Type	Fiber Type	Length	Ferrule
	08= 8 Line	08= 8 Line	1=1310/1550		S=Stright Through	R=Round	1=G652D SMF-28e	1=1m	S=Standard
	12=12 line	12=12 Line	2=850		C=Cross over	B=Ribbon Fiber	3=50/125 OM3	X=Specify	L=Low Loss
	24=24 Line	24= 24 Line			P=Cross Pair		4=50/125 OM4		
		LC=LC/UPC							
		LA=LC/APC							
		SC=SC/UPC							
		FC=FC/UPC							